




'S' Series Chain Hoists

Capacities: 500kg to 30 tonnes

FEATURES

- Lightweight robust construction
- Super strength alloy loadchain
- Fully machined liftwheel
- Minimum headroom
- Minimum effort to raise maximum load
- Cast steel safety latches
- Lower hook complete with thrust race
- Fully enclosed gear train
- Weather protected automatic Weston brake with unique Twin Pawls
- Galvanised handchain as standard
- Durable baked enamel paint protection
- Stainless Steel labels
- Spare parts always available

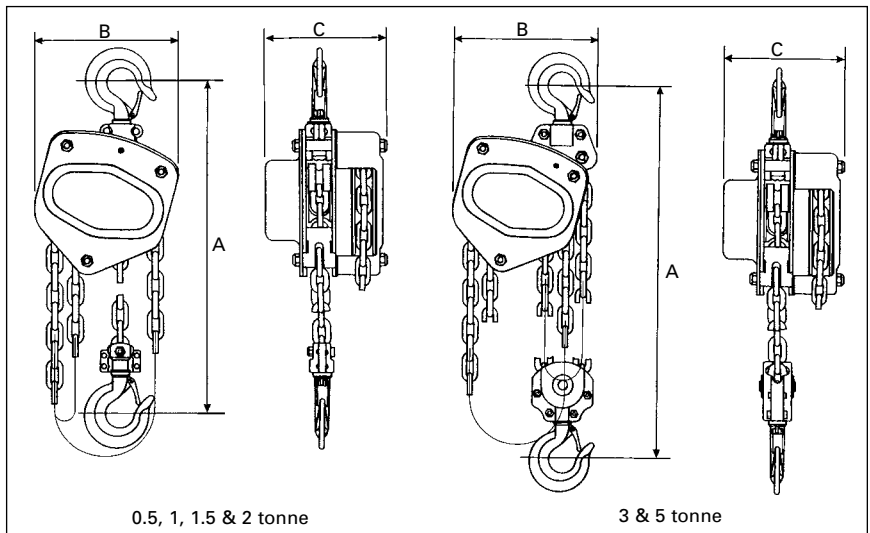

Chain Bags also available.

| Product Code | SOCB05 | SOCB1 | SOCB1.5 | SOCB2 | SOCB3 | SOCB5 | SOCB10 |
|---------------------------|--------|-------|---------|-------|-------|-------|--------|
| Working Load Limit | 0.5 t | 1 t | 1.5 t | 2 t | 3 t | 5 t | 10 t |
| Standard lift | 3 m | 3 m | 3 m | 3 m | 3 m | 3 m | 3m |
| Falls of chain | 1 | 1 | 1 | 1 | 2 | 2 | 4 |
| Effort to lift W.L.L. | 23 kg | 30 kg | 32 kg | 35 kg | 27 kg | 41 kg | 39 kg |
| Net weight | 10 kg | 12 kg | 13 kg | 22 kg | 32 kg | 46 kg | 68 kg |
| Loadchain diameter | 6 mm | 6 mm | 8 mm | 8 mm | 8 mm | 10 mm | 10 mm |
| CLEARANCE DIMENSIONS (mm) | | | | | | | |
| A (Headroom) | 270 | 317 | 399 | 414 | 465 | 636 | 750 |
| B (Width) | 127 | 158 | 187 | 187 | 210 | 253 | 373 |
| C (Depth) | 131 | 140 | 161 | 161 | 161 | 161 | 184 |
| Hook opening (upper) | 30 | 28 | 36 | 33.5 | 40 | 50 | 64 |
| Hook opening (lower) | 30 | 28 | 36 | 33.5 | 40 | 50 | 64 |

• N.B. Specifications and dimensions for 20 & 30 tonne available on application.

COMPLIES WITH AS/NZS1418.2

Meets or exceeds all relevant world standards

